


# RAVENOL ATF Flush

**Kategorie:** Additives

**Artikelnummer:** 1390501

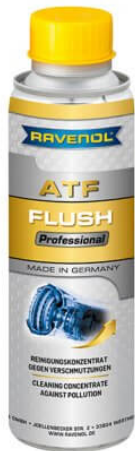

**0.3L | 1390501-300**

**RAVENOL ATF Flush** is an active ingredient concentrate for the cleaning of all types of automatic transmissions. It protects against corrosion and premature wear.

**RAVENOL ATF Flush** effectively dissolves dirt and sludge deposits in the automatic transmission with cleaning-intensive surfactants and removes them effectively in draining the used oil.

**RAVENOL ATF Flush** extends the service life of automatic transmissions and secures the optimal switching function.

## Application Note

**RAVENOL ATF Flush** is added to the warm transmission oil for cleaning before the transmission oil change.

Dosage: 300 ml **RAVENOL ATF Flush** is sufficient for an application of up to 8L of transmission oil, regardless of the manufacturer.

Application: Add the contents to the warm gear oil before changing the oil. The oil level must not fall below the minimum. For maximum effect, allow to run for up to 15 minutes. Shift through all gear positions under load changes. Afterwards, replace oil and filter, immediately.

**RAVENOL ATF Flush** is particularly suitable for use with the RAVENOL Dynamic Exchanger.

## Characteristics

- Removes residues in the gearbox
- Ensures optimum shifting function
- Extends the service life of the automatic transmission
- Protects against corrosion and wear
- Suitable for use with ATF cleaning devices such as the RAVENOL Dynamic Exchanger

## Technical Product Data

PROPERTY	UNIT	DATA	AUDIT
Density at 20 °C	kg/m <sup>3</sup>	800	EN ISO 12185
Colour		hellgelb	VISUELL
Viscosity at 40 °C	mm <sup>2</sup> /s	2	DIN EN ISO 3104
Flashpoint (PM)	°C	61	DIN ISO 3679

All indicated data are approximate values and are subject to the commercial fluctuations.